



Downtube Series

- High Volume Supply
- Competitive Price
- Durable Battery Life

E-bike Battery Solution Provider



YB279



YB330




YB372

YB279

Specifications

1. Cell Type: 18650
2. Dimension: 389(L)mmx115mm(W)x81mm(H)
3. Rated Voltage: 48V/36V
4. Rated Capacity: 10.4Ah/13Ah/15.6Ah
5. Charge&Discharge Mode: CC&CV
6. Cycle Life≥1000 times
7. Internal Resistance≤230mΩ
8. Charge: Standard Charge Current: 2A
9. Discharge: Standard Discharge Current, 10A.
Max Discharge Current, 35A
10. Working Temp : Charge Temperature: 0~45°C, Discharge Temperature: -20~55°C

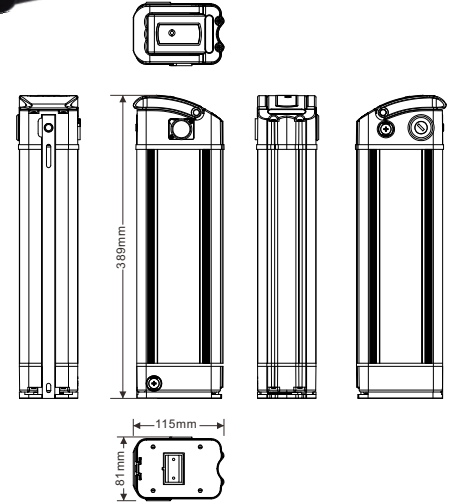


Model	Vol	Cap	L	W	H	Weight	Curr	Max Curr
YB279-36-10	36V	10.4Ah	389mm	115mm	81mm	3.5 kg	22A	80-200A/3MS
YB279-36-13	36V	13.0Ah	389mm	115mm	81mm	4.2 kg	22A	80-200A/3MS
YB279-48-13	48V	13.0Ah	389mm	115mm	81mm	4.7 kg	22A	80-200A/3MS
YB279-48-15	48V	15.6Ah	389mm	115mm	81mm	5.1 kg	22A	80-200A/3MS

YB330

Specifications

1. Cell Type: 18650
2. Dimension: 441(L)mmx115mm(W)x81mm(H)
3. Rated Voltage: 36V/48V
4. Rated Capacity: 10.4Ah/15.6Ah/18.2Ah
5. Charge&Discharge Mode: CC&CV
6. Cycle Life≥1000 times
7. Internal Resistance≤230mΩ
8. Charge: Standard Charge Current: 2-3A
9. Discharge: Standard Discharge Current, 10A.
Max Discharge Current, 35A
10. Working Temp : Charge Temperature: 0~45°C, Discharge Temperature: -20~55°C

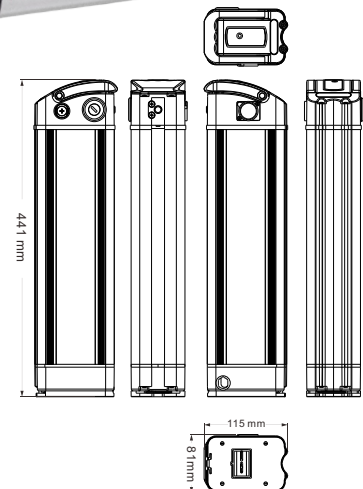


Model	Vol	Cap	L	W	H	Weight	Curr	Max Curr
YB330-36-10	36V	10.4Ah	441mm	115mm	81mm	4.1 kg	22A	80-200A/3MS
YB330-36-15	36V	15.6Ah	441mm	115mm	81mm	5.1 kg	22A	80-200A/3MS
YB330-48-18	48V	18.2Ah	441mm	115mm	81mm	6.3 kg	22A	80-200A/3MS
YB330-48-15	48V	15.6Ah	441mm	115mm	81mm	5.9kg	22A	80-200A/3MS

YB372

Specifications

1. Cell Type: 18650
2. Dimension: 484(L)mmx115mm(W)x81mm(H)
3. Rated Voltage: 36V/48V
4. Charge&Discharge Mode: CC&CV
5. Cycle Life≥1000 times
6. Internal Resistance≤230mΩ
7. Charge: Standard Charge Current: 2A
8. Discharge: Standard Discharge Current, 10A.
Max Discharge Current, 35A
9. Working Temp : Charge Temperature: 0~45℃, Discharge Temperature: -20~55℃

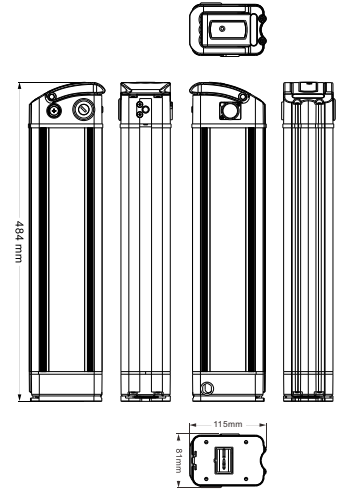

Model	Vol	Cap	L	W	H	Weight	Curr	Max Curr
YB372-36-24	36V	24.5Ah	484mm	115mm	81mm	7.2 kg	22A	80-200A/3MS
YB372-48-20	48V	20.3Ah	484mm	115mm	81mm	7.71 kg	22A	80-200A/3MS

Product details



LED indicator




Discharge port



Individual Cell Fusing Available


Expanded details

1	Aluminum Drum
2	Nickel Solder Tab
3	Bracket of batteries
4	Top cabinet
5	BMS
6	Cell
7	Bracket of batteries 2
8	Nickel Solder Tab
9	Lower cabinet
10	Baseboard
11	Fixed aluminum bar

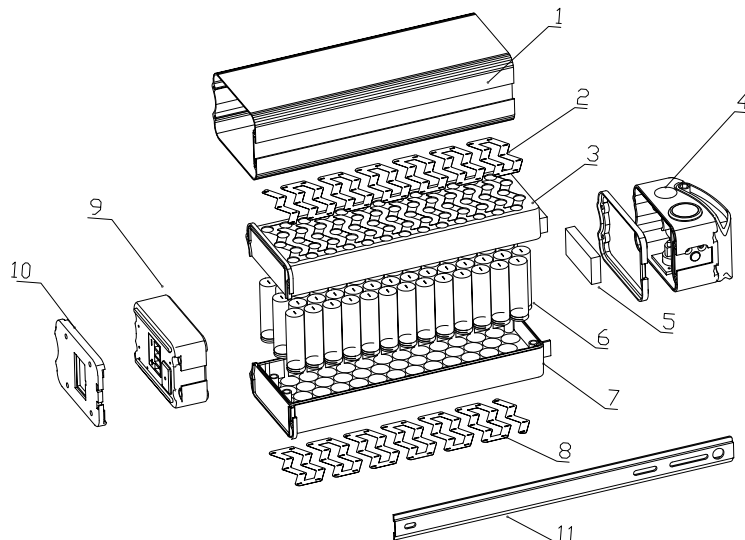


Fixing aluminum bar


YB-279

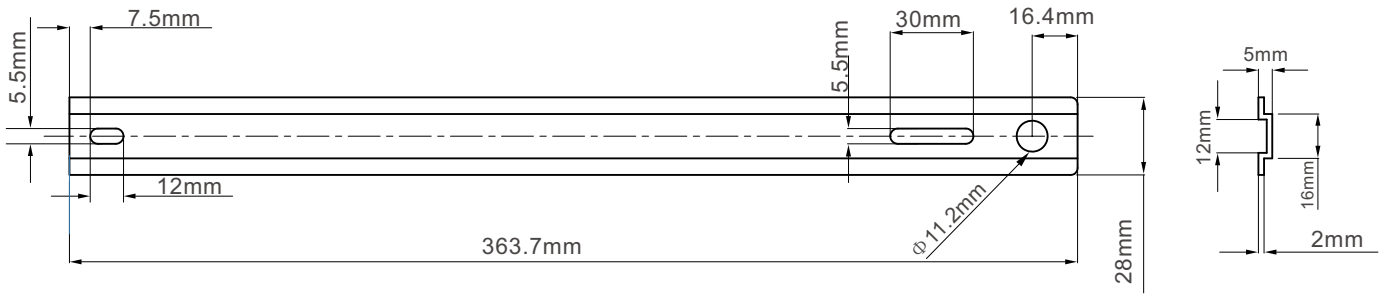

YB-330

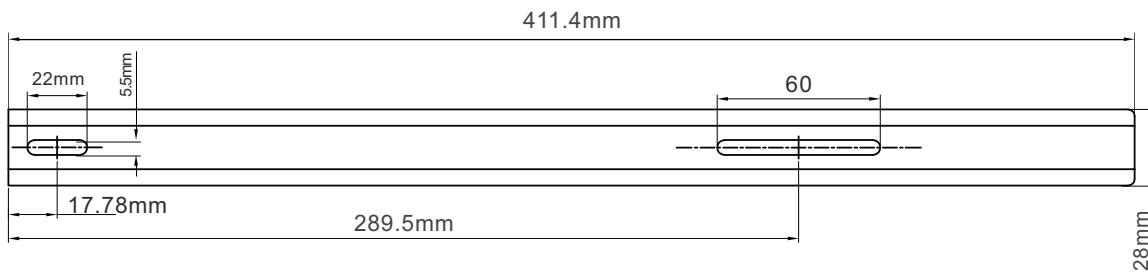

YB-372

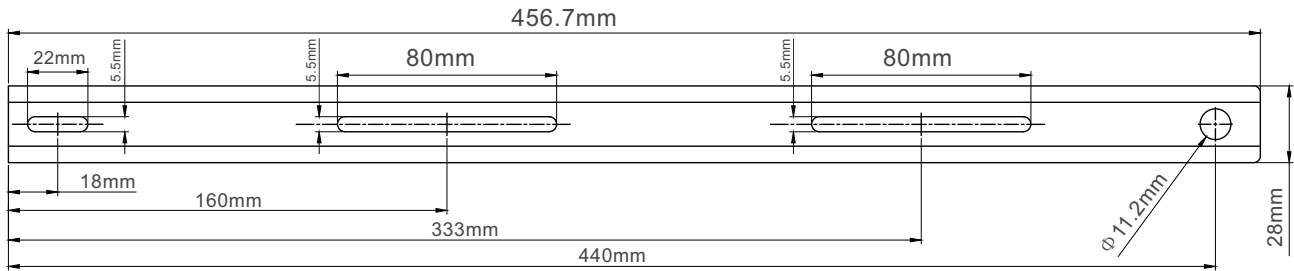

Turnlife Worldwide



Turnlife LLC

Tel : +1-949-264-1535 E-mail :sean@turnlife.com stevan@turnlife.cn
Address : Newport Beach, California, USA



Turnlife Europe

Tel : +49-157-761-08299 E-mail : sales05@turnlife.cn



Shenzhen Turnlife Technology Co.,Ltd

Tel : +86-755-2988-5577
E-mail : sales03@turnlife.cn stevan@turnlife.cn
Address : Block 3B, Huiye Tech Park, Guanguang Rd, Guangming, Shenzhen, China

Anhui Turnlife New Energy Technology Co., Ltd

Tel : +86-0550-3325501 E-mail : sales06@turnlife.cn
Address : East of No.29 Suchu Morden Industrial Park, Chuzhou City, Anhui, China

www.turnlife.cn www.turnlife.com www.turnlife.en.alibaba.cn